

# 6218



## SOFT SERVE FREEZER

Single flavor, Countertop, Gravity feed

### Product Offering

Offer all popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet

### Freezing Cylinder

One, 1.7 Liter (1.8 quarts)

### Mix Hopper

One, 8 Liters (8.45 quarts)

Separate hopper refrigeration maintains mix temperature below 4.4°C (40°F) during Cool and Standby modes.

### Mix Low Indicator

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

### Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 4.4°C (40°F) during long no-use periods.

### Controls

Automatically regulates refrigeration by monitoring product viscosity to maintain consistent quality.

### Output

100 Cups/Hour  
(80 gram/cup at 4°C Liquid & 24°C Ambient)

### Safety Protections

- Low temperature cutouts protect from cylinder over freezing.
- High pressure switch prevents compressor overheat.
- Thermal overload protects motor from overheat.



50 Hz.  
Models



#### SPACEMAN ICE SYSTEMS (HK) CO, LIMITED

FACTORY: 1 GUANZE RD, INDUSTRY PARK, DAIXI TOWN, HUZHOU, ZHEJIANG, CHINA 313023



PHONE: +86 572 3826788

FAX: +86 572 3826799

www.spaceman-company.com

Email: info@spaceman-company.com

ISO 9001: 2008  
Registered Firm

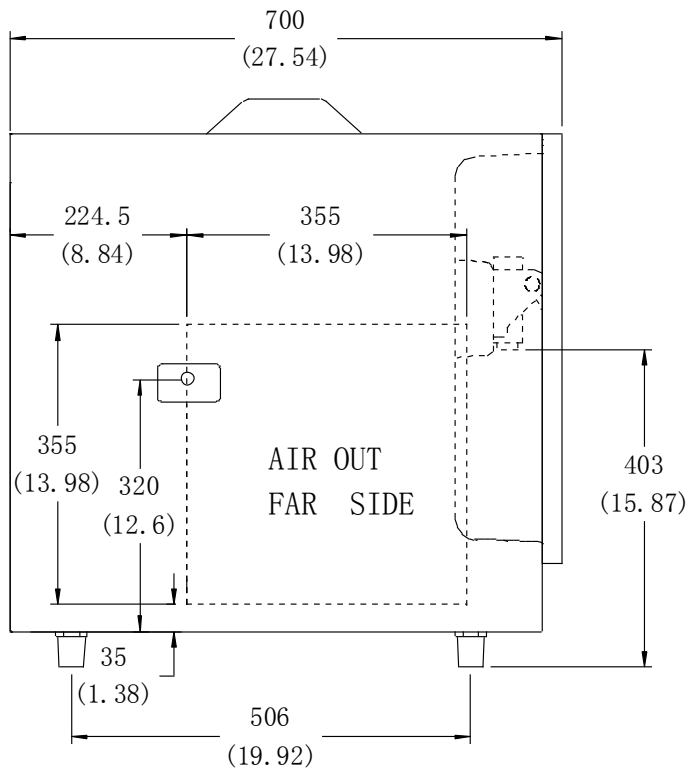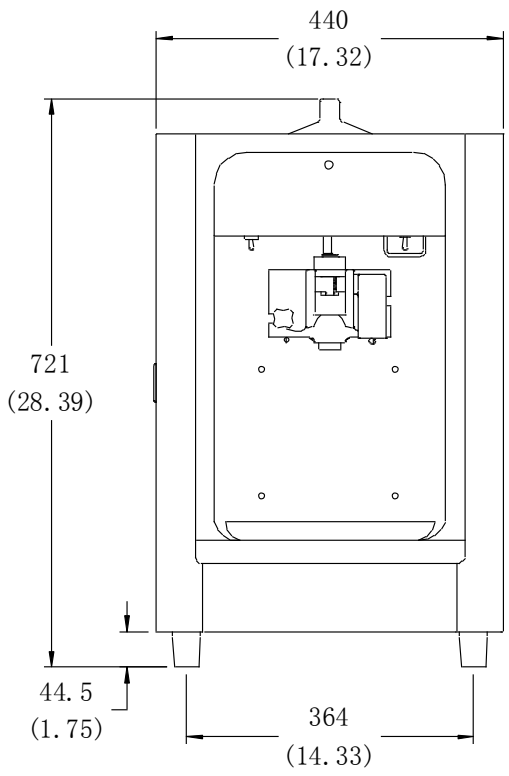

Weight	Kg/lb
Net	101 / 223
Shipping	113 / 249

**Packaging Volume** 0.34 CBM / 12.10 CBF

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	440 / 17.3	500 / 19.7
Depth	700 / 27.6	770 / 30.3
Height	721 / 28.4	890 / 35.0

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires (W)
220-240/50/1	20	8	3P/3W
208-230/60/1	20	10	3P/3W

*This unit may be manufactured in other electrical characteristics. Refer to the local distributor for availability.  
(For accurate electrical information, always refer to the data label of the unit.)*

**Note**  
Continuing research will result in steady improvements. Therefore, these specifications are subject to change without notice.

**Specifications**

**Electrical**  
One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

**Motor**  
One, 1.25HP

**Refrigeration System**  
Main Compressor: One, 3150 BTU/HR, R404A

Separate Hopper Cooling Compressor:  
One, 480 BTU/HR, R134A  
(BTUs may vary depending on compressor used.)

**Air Cooled**  
Minimum clearance of 152mm (6") on both sides is required to achieve optimum performance. The rear of the unit may be placed against a wall.

- Options**
- Water Cooled.
  - Cone dispenser