

# 6248A



MODEL 6248A

## SOFT SERVE FREEZER

Twin twist flavor, Floor, Pump feed,  
Microprocessor control, Independent refrigeration and  
control system for each flavor

### Product Offering

Offer all popular soft serve variations from low or  
non-fat ice cream to custards, yogurt and sorbet

### Freezing Cylinder

Two, 1.7 Liter (1.8 quarts)

### Mix Hopper

Two, 10 Liters (10.6 quarts)  
Separate hopper refrigeration maintains mix  
temperature below 4.4°C (40°F) during Cool and  
Standby modes.

### Mix Low Indicator

When mix level is low, the Mix Low light turns "ON"  
to alert operator to add mix.

### Standby

Maintains product temperature in the mix hoppers  
and freezing cylinders below 4.4°C (40°F) during  
long no-use periods.

### Microprocessor Controls

Automatically regulates refrigeration and maintains  
consistent product quality by controlling product  
temperature and viscosity.

### Counter

Records number of dispenses per day and total  
number of dispenses.

### Temperature Display

Displays hopper and cylinder temperature; helps  
control product safety

### Output

390 Cups/Hour  
(80 gram/cup at 4°C Liquid & 24°C Ambient)

### Safety Protections

- Low temperature and motor overload cutouts  
protect from cylinder over freezing.
- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat



Selected 60  
Hz. Models

50 Hz.  
Models



Flexible blade beater  
Higher capacity, higher overrun



#### SPACEMAN ICE SYSTEMS (HK) CO, LIMITED

FACTORY: 1 GUANZE RD, INDUSTRY PARK, DAIXI TOWN, HUZHOU, ZHEJIANG, CHINA 313023



PHONE: +86 572 3826788

FAX: +86 572 3826799

www.spaceman-company.com

Email: info@spaceman-company.com

ISO 9001: 2008  
Registered Firm

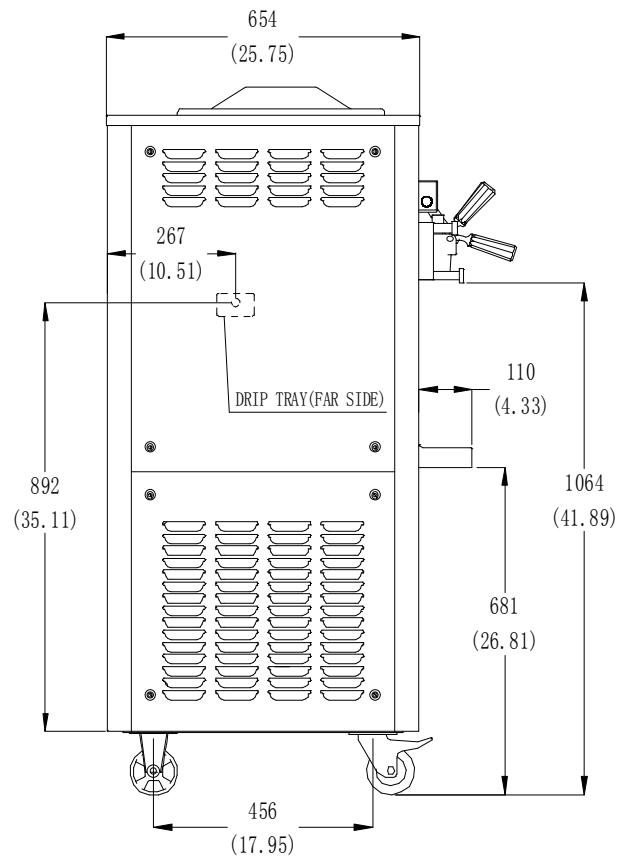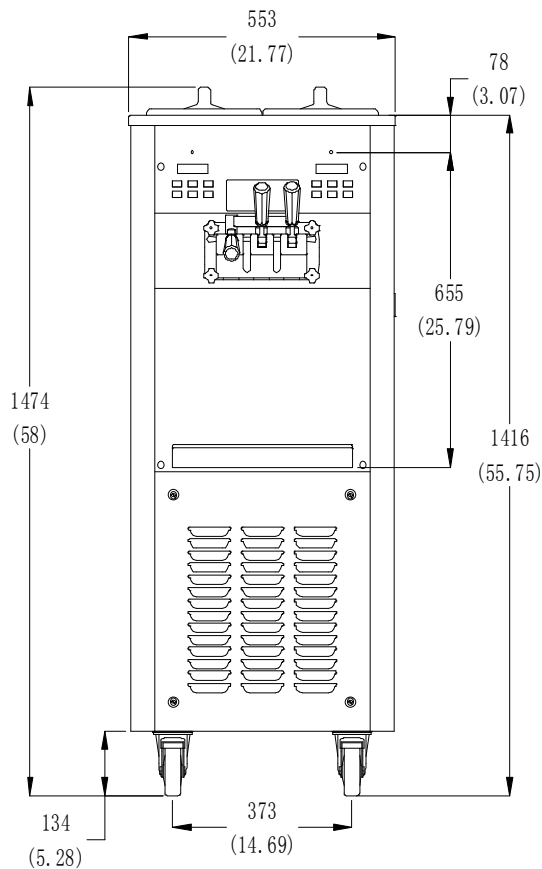

Weight	Kg / lb
Net	211 / 469
Shipping	228 / 507

**Packaging Volume** 0.82 CBM / 29 CBF

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	553 / 21.8	650 / 25.6
Depth	654 / 25.7	780 / 30.7
Height	1474 / 58.0	1620 / 63.8

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires(W)
220/50/1	24	20	/ 3W
220/60/1	30	24	/ 3W
220/60/3	20	16	/ 4W

*This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.  
(For exact electrical information, always refer to the data label of the unit.)*

**Note**

Continuing research results in steady improvements; therefore these specifications are subject to change without notice.

**Specifications**

**Electrical**

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

**Motor**

Two, 1.25HP

**Refrigeration System**

Main Compressor: Two, 3150 BTU/HR, R404A

Separate Hopper Cooling Compressor:

One, 480 BTU/HR, R134A

(BTUs may vary depending on compressor used.)

**Air Cooled**

Minimum clearance of 152mm (6") on unit left, right, and back sides is required to achieve optimum performance.

**Options**

- Water Cooled.
- Local language Control systems: English, French, Spanish, German, Dutch, Czech, Chinese.
- Cone dispenser